

Menutree Website:


- + Products / docu / downloads
- + Accessories
 - + Connector / Power supply
 - + Connector 2pins small

QR-Code Website:



Please make sure to update your drivers before using our products.

Network-analysis/-monitoring easy

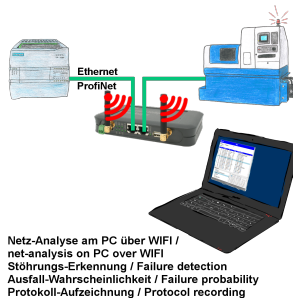

Analyze network-problems and network-conflicts with little effort. Simply plug the TINA-II into the network, open website of the integrated web-server via WIFI and start working.


No unnecessary search for a hub to record the logs. TINA-II records in the usual WireShark-format, i.e. save the recording on a PC and view and evaluate it later with WireShark.

Monitoring the network, automatically send an email to the administrator if there is no participant or if there is a new participant (Intrusion-detection into the network)

Calculate the probability of failure of the participants


All of this can be achieved with TINA-II

PLC-coupling (data exchange between PLC-devices)

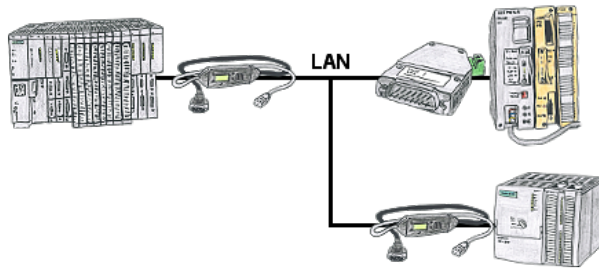

Your pumping stations report the water levels of the central control via telephone network. The central office itself can of course transmit commands/messages to the substations as well. There to no dedicated line is required, it's sufficient when the stations connect via network (DSL-router).

Interface-products for S5-PLC

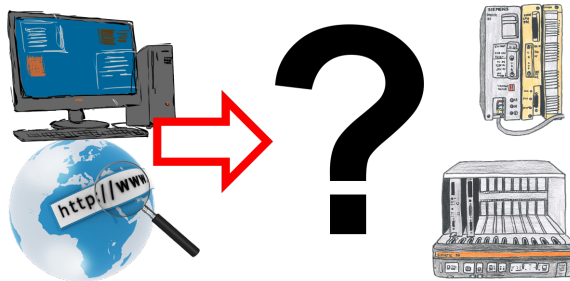

Communication with S5-PLC, just how and with what?

Data communication with S5-PLC from PC or other devices, which interface fits on/to my controller. All questions you don't have to worry about. With "Programming adapter S5" you get the right interface.

Select the interface of your PC or device (serial via COM-port, USB, Ethernet (network), WIFI) and you will be shown the possible products.


Which one you use then is up to you.

Wireless around the machine with LAN-port



Move wirelessly around the machine with LAN-port and communicate for example ONLINE in the status

Move around the machine wirelessly




Controlling/monitoring all around the machine with a PC => nobody has such a long cable with them

Move around the machine without fear that the cable will be too short or someone will run over it and damage it. Always ONLINE and intervene at the appropriate moment or trigger a circuit-breaker/button and observe the reaction of the machine, always ONLINE via WIFI on the machine.


LAN-WIFI-conversion solves all problems and possible dangers

Failure report transmission without any change in the PLC programm

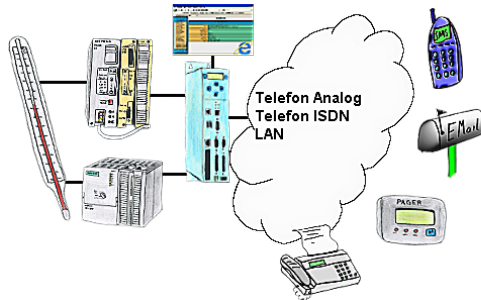

Your outstation reports the current value cyclically, or in case of malfunction the status via FAX, as SMS to your mobile phone, to your pager or also via e-mail. And this without an intervention of the PLC-program. Here the variables and actions are stored and processed in the TP-II.

Integrated Firewall-protection

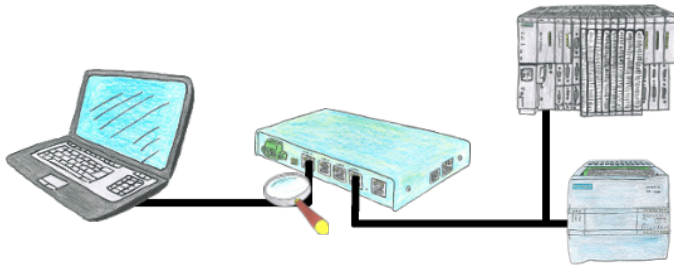

You looking for a device with which you can create a remote maintenance via the Internet without compromising security? No problem, the TELE-Router offers exactly this feature. With the built-in firewall, you can adjust the device completely to your requirements.