

**Menutree Website:**


- + Products / docu / downloads
- + Accessories
  - + Connector / Power supply
  - + Connector 2pins big

**QR-Code Website:**



Please make sure to update your drivers before using our products.

**Profinet-Member-Analysis**



Exact analysis of your Profinet members.  
Addresses, configurations and other data can be recorded directly.  
See immediately possible conflicts due to the configuration.

## Wireless around the Schneider-PLC



Move wirelessly around the Schneider-PLC and communicate for example ONLINE in the status


## Universal - prepared for all situations



Prepared for every application, who likes to go unprepared the situation that expects one at a use on site, except house? With the S5/S7-WIFI-sets you have everything necessary for use in a handy plastic-case. No forgotten cable, often only a cent article but worth gold if you forgot him at home.

No unnecessary search for accessories, according to the motto: "open suitcase, connect/build and work".

## S7-PLC and serial ASCII-data

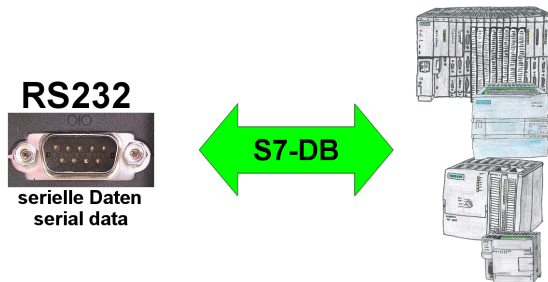


S7-PLC should process serial ASCII-data from another/external device and send back the corresponding data?

"RS232 on S7" receives this serial data and transfers it to a data-block of your choice specified in the configuration. The S7-PLC can then process the data received in this way and send back an answer via a data-area that is also defined.


The baud-rate of the serial line can be freely selected. This allows communication with the ASCII-transmitter to be implemented, with the S7-PLC using the two specified data-areas as input-/send-compartments.

## Wireless around the Beckhoff-PLC



Move wirelessly around the Beckhoff-PLC and communicate for example ONLINE in the status

## Oxygen analysis in industrial gases




Continuous measurement and display of the oxygen-content without an operating-function on the measuring-device or measuring-range-switching?

OSC-II-devices are the solution, they show the O<sub>2</sub>-value from % down to E -24 without any action on the part of the operator. The measuring range will be automatically switched between the various measuring-ranges, the optimal measuring-range is always displayed and used. You can also parameterize integrated relay-outputs and thereby use trigger-actions depending on the detected oxygen-concentration. The device is available in different versions:

19"-mounting, case-device and table-top-device. Also available as a wall-mounted-device on request.

## Worldwide remote-access thanks to our own cloud

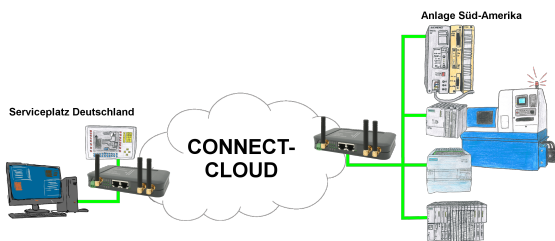

Worldwide remote-maintenance without additional costs thanks to our own cloud

Your devices connect to your own cloud, no matter where they are in the world. Only your devices are in your own private cloud, no one else has access to the cloud. In addition, you can provide each device with its own connection-password, so that the individual systems are protected despite the private cloud.

No registration on any portals, no hidden additional costs, your devices in your own cloud are always accessible.

This is how remote maintenance/remote access is fun.