

Menutree Website:


- + Products / docu / downloads
- + Hardware
 - + Time
 - + DCF-77-antenna

QR-Code Website:



Please make sure to update your drivers before using our products.

Data backup S7-PLC over MPI/Profibus on USB-stick



S7-PLC triggered DB-backup/-restore without additional PC via MPI/Profibus on USB-stick

Universally on machine and PLC




Remote access to all your systems, PLCs without great effort. Even triggering of actions by setting the integrated digital-outputs or reading in the digital and analog-inputs is possible via the Internet connection.

Regardless of whether you use your PC with the CONNECT-software or have connected a device from the CONNECT-family. Couplings via LTE also enable access to the LAN-interface on the system side. No special SIM-card is required for this.


A solution with little effort and everything within your "private" cloud.

Serial communication with CP and more S5-assemblies

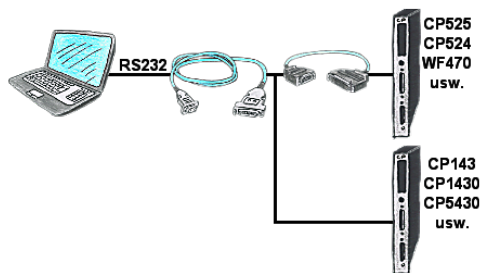

You have a PC with programming software and a 9pin COM-port as interface? No problem, for this purpose the PG-UNI-II-cable is exactly the right product. Connect it to a Siemens assembly such as H1-CP (CP1430), WF470 and PC or CP-525 with the CP525-adapter and PC and you're Online.

Interface-products for S7-PLC

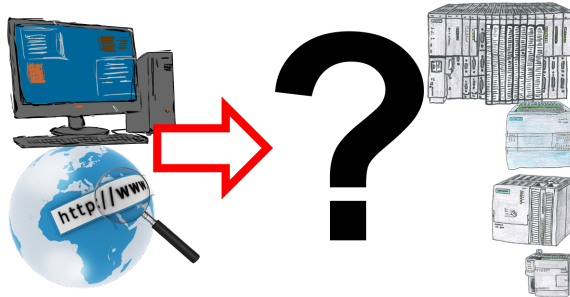

Communication with S7-PLC, just how and with what?

Data communication with S7-PLC from PC or other devices, which interface fits on/to my controller. All questions you don't have to worry about. With "Programming adapter S7" you get the right interface for PPI, MPI and Profibus.

Select the interface of your PC or device (serial via COM-port, USB, Ethernet (network), WIFI) and you will be shown the possible products.

Which one you use then is up to you.

Profinet-Member-Analysis




Exact analysis of your Profinet members.

Addresses, configurations and other data can be recorded directly.

See immediately possible conflicts due to the configuration.

Parallel access LAN/WiFi

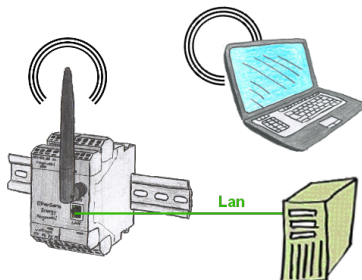

Access parallel via LAN and Wifi to the EtherSens-device. Therefor create via the web-server for each way an ip-address, regardless whether its the same subnet or not.

Recognize missing Profinet participants



Recognize cable breakage, contact problems and line faults.
Retransmissions and failures are logged and reported.
Early acting before total failure of the participant.