

Menutree Website:


- + Products / docu / downloads
- + Hardware
- + Time
- + DCF-77-antenna

QR-Code Website:



Please make sure to update your drivers before using our products.

Serial communication with CP and more S5-assemblies

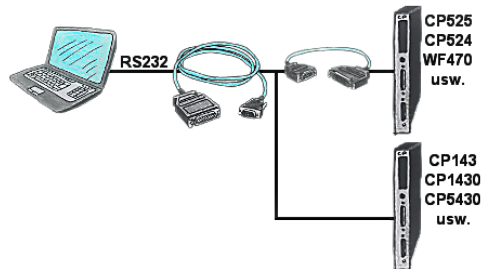

You have a PC with programming software and a 9pin COM-port as interface? No problem, for this purpose the PG-UNI-cable is exactly the right product. Connect it to a Siemens assembly such as H1-CP (CP1430), WF470 and PC or CP-525 with the CP525-adapter and PC and you're Online.


Operation/control via integrated web-server



Observe the collected energy-information (voltages, power, currents, phase-angles, ...) on the integrated web-server of _MONI_ "cable-less" with your mobile-phone or tablet. Change the parameterization of _MONI_, operate and control _MONI_ easily via the web interface.

Of course you can also operate wired, where you put _MONI_ in your network. Parallel operation of LAN and Wifi is also possible.

Malfunctions on the Bus although everything is (apparently) connected properly?

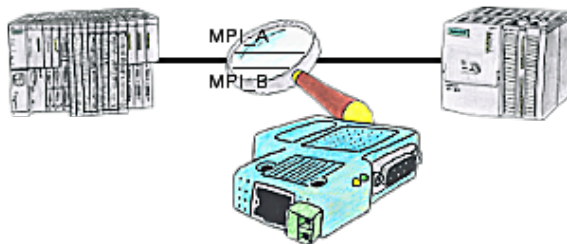

The S7-LAN can also be used for controlling/checking the MPI/Profibus. It will be plugged on the Bus so that you can take a look at the status of the busses via software on PC, for example the numbers of parity errors.


Use on-site without PC-adapter?



With the TeleService-device you can connect serial or by USB-cable to your PC/laptop and then communicate directly with the control without a PC-adapter or other S7-programming cables.


The USB-cable is a standard-cable just as the one you use at your printer.

Data backup S7-PLC PN-port on SD-card via dig. IO




Via digital input triggered DB-backup/-restore without additional PC via PN-port to SD-card

PLC-coupling (data exchange between PLC-devices)

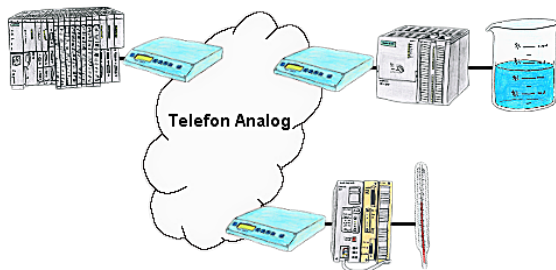

Your pumping stations report the water levels of the central control via telephone network. The central office itself can of course transmit commands/messages to the substations as well. Thereto no dedicated line is required, a "normal" telephone connection is sufficient because the devices hangs up the line after occurred message.

Operation as an access point

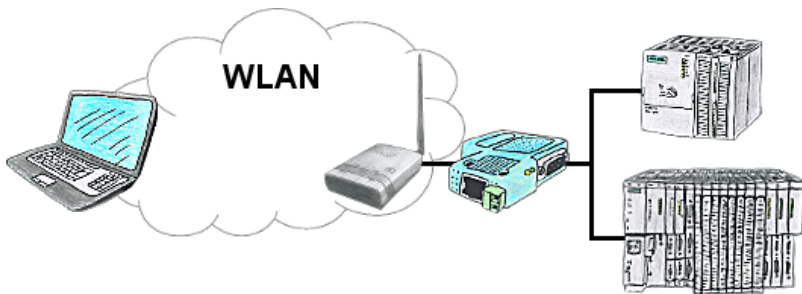

You are on site your plant and should move round the machine and simultaneously control or monitor. No problem, you parametrize ALF as an access-point and connect your S7-LAN or other network-client to him, connect your PC with him and you are online on the PLC.