

**Menutree Website:**

- + Products / docu / downloads
- + Accessories
  - + Prolongation-Sets
  - + PG-UNI lengthening set

**QR-Code Website:**




Please make sure to update your drivers before using our products.

Remote-maintenance Siemens-S7-PLC with MPI/Profibus over VPN-server




Remote-maintenance of a Siemens-S7-controller with S7-LAN on MPI/Profibus over separate VPN-server

## E-Mail notification

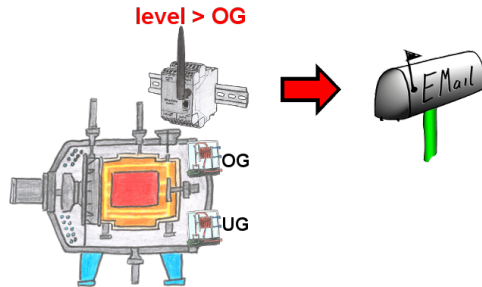


Do you monitor processes and upon reaching a predetermined upper/lower limit, you need a message? Then activate in the device the limit-value-monitoring and you get this message. Furthermore, the device also sends its state and you are always up to date.

## Recognize missing Profinet participants



Recognize cable breakage, contact problems and line faults.  
Retransmissions and failures are logged and reported.  
Early acting before total failure of the participant.

## Transformation of Rack/Slot in TSAP to MPI-address

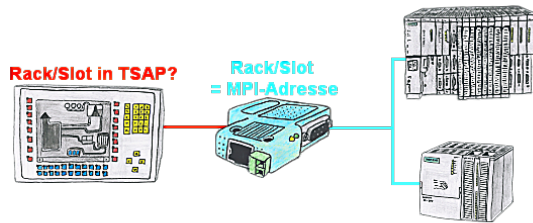


Your panel or visualisationsystem addresses the used PLC with Rack/Slot in TSAP? No problem, activate this mode in the S7-LAN and you will get actual data from the PLC.

## Wireless around the Schneider-PLC




Move wirelessly around the Schneider-PLC and communicate for example ONLINE in the status

## Visualisation of your S7- PLC via COM-Port

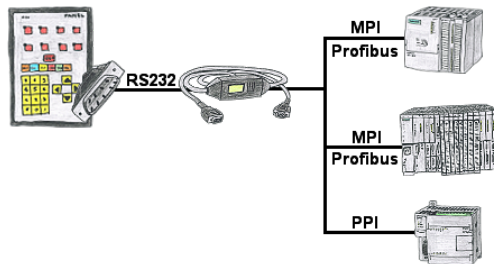

Your panel provides a serial port and no MPI/Profibus for connecting a S7-PLC. Connect the MPI/PPI-cable with it and you're Online with your panel.

## Documentation of oxygen concentration

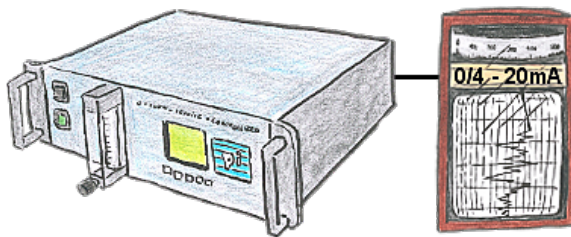

The integrated current output issues the actual concentration in the range of 0/4 - 20mA via free definable limits.