

Menutree Website:


- + Products / docu / downloads
- + Hardware
- + Time
- + DCF-amplifier

QR-Code Website:



Please make sure to update your drivers before using our products.

Data backup S7-PLC over MPI/Profibus on SD-card




S7-PLC triggered DB-backup/-restore without additional PC via MPI/Profibus on SD-card

Remote-maintenance Siemens-S5-PLC with firewall




Remote-maintenance of a Siemens-S5-PLC with S5-LAN++ on PD-port via secure VPN-tunnel and scalable firewall

Backup of formulas without knowledge of PLC




You consistently have to back up formulas which are stored in data blocks or back up production protocols, but the employee in charge has no knowledge of PLC-programming respectively handling PC-programs? No problem, install the PG-2000-software with "option DB-backup" on your PC and connect it with the PLC. The employee only has to click on a symbol on the desktop of the PC and the data blocks of the parameterised PLC will be stored on the fixed disc. Afterwards the program closes itself and the mentioned employee didn't had to accomplish an intervention on the program.

Take over control-tasks

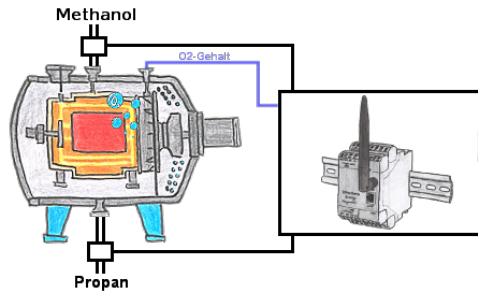

Capture with the Ethersens-device not only your process-values, you would be able to do control-tasks with the device.

Autonegotiation on RJ-45

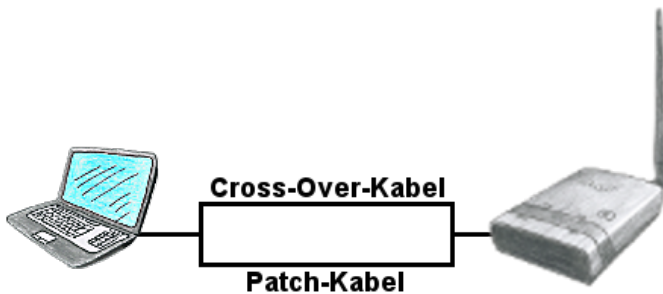

You need ALF to connect to a reachable WLAN, but only have a patch-cable? No problem, ALF provides "autonegotiation" and this means that he recognises a connected cable (patch-cable or cross-over-cable) and surround the pinning according to the cable, so a communication is possible.

Detect Profinet burglary




Detection and logging of unauthorized access in the defined Profinet

Attempted break-ins and access to the network are recognized immediately and e.g. reported by email

Logging of all accesses in the network for historical processing

Possible data-storage USB-stick or FTP-server via USB-network-stick.

PLC coupling (data exchange between PLC's)

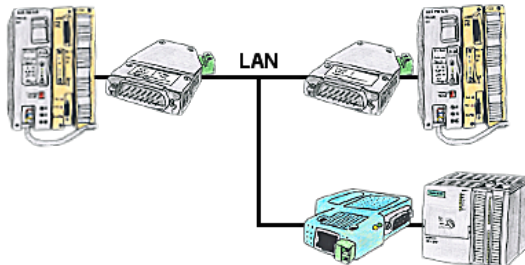

Your pumping stations report the water levels of the central control via telephone network. The central office itself can of course transmit commands/messages to the substations as well. Therefore no dedicated line is required, it's sufficient when the stations connect via network (DSL-router).