Menutree Website:
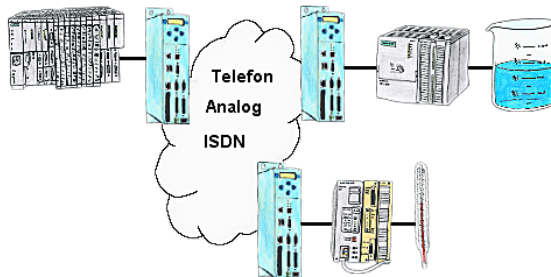
+ Products / docu / downloads
  + Hardware
    + Time
      + PLC-clock

QR-Code Website:

Please make sure to update your drivers before using our products.
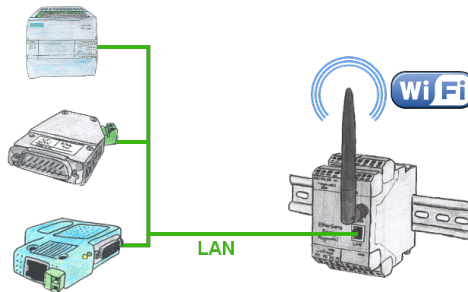

PLC coupling (data exchange between PLCs)

Your pumping stations report the water levels of the central control via telephone network. The central office itself can of course transmit commands/messages to the substations as well. Thereto no dedicated line is required, a "normal" telephone connection is sufficient because the devices cut the line after occured message.

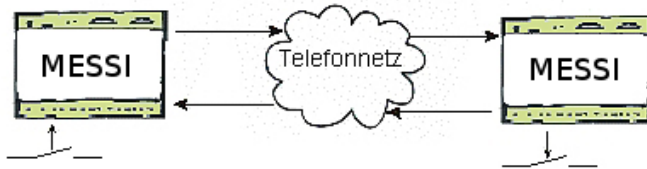## DB-Backup/Restore S7-PLC PN-port on USB-stick via dig. IO

Via digital input triggered DB-backup/-restore without additional PC via PN-port to USB-stick

LAN-subscriber to the WiFi

You also need to network devices but dont have locally no ethernet-cable. Wifi is available? With the EtherSens-Bridge you bring immediately all connected wired participants in the WLAN network.

The MESSI will be called by conventional Telephone or by mobile-phone. With a direct voice message and DTMF-tone dialling the corresponding output will be set-up. If a switching operation has come off a speech output will confirm it.

S7-PLC over LAN

Communication with S7-PLC via Ethernet, just how and with what?
Data-communication with S7-PLC from PC or other devices via network, which interface is required. Questions you don't have to worry about. With "S7 over LAN" you get the right interface-products for PPI, MPI and Profibus.
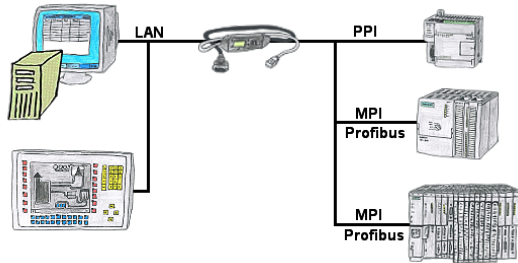Which one you use then is up to you.

Send of all kinds of SMS-messages controlled by the LOGO!-Control

Watching of S7-PLC-devices via LAN without Ethernet-CP

Your panel only has a LAN-socket as PLC-interface? No problem, connect this socket with the S7-LAN or the MPI-LAN-cable and plug it directly on the PPI/MPI/Profibus of the PLC. Then access to the variables and data of the PLC is already available.