

Menutree Website:


- + Products / docu / downloads
- + Hardware
 - + Remote maintenance
 - + S5
 - + Analogue-telephone
 - + TELE-PROFessional (TP)

QR-Code Website:




Please make sure to update your drivers before using our products.

Logged data to Excel

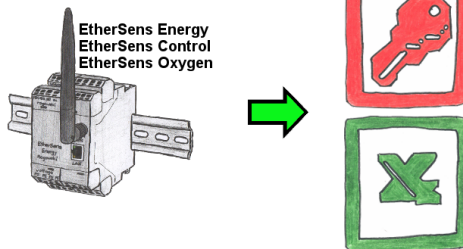

Capture the required values, whether if energy-data, states of inputs or outputs, process values such as oxygen-content in the environment,... and write this with a timestamp in a CSV-file. This file can then be read and processed with Excel.

Interface-converter with galvanic decoupling




Coupling of 2 devices with different hardware-interfaces?

Devices of the UNI-COM-series offer the implementation of different hardware-interfaces with simultaneous galvanic-separation of both sides up to 1000V. Connections to the device via screw-terminals or via the integrated D-Sub with screw-locking. Universally usable for every application.


Only a 24V DC supply is required for the converter.

SMS Email with LOGO!




Send of all kinds of SMS-messages controlled by the LOGO!-Control

Fuzzy controller with the OSC-II

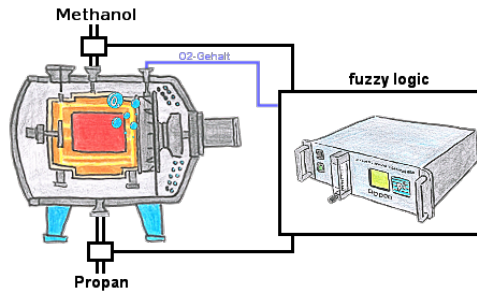


Through 3 free configurable limits (of each kind) you wont be able to realice a fuzzy-controller of your heat treatment furnace.

Data logging of your PLC




You shortly need a logging of your PLC's operating states respectively are on the way of figuring out a problem and have no datalogger? No problem, connect the PC, start the PG-2000-software with "option datalogger", define relevant variables, appoint timestamp and then the recording starts running immediately. The data will be stored on the fixed disc according to the configuration.

Profinet-monitoring/-diagnosis inclusive alarm-messages



Detect intrusions and anomalies on your ProfiNet.
Early detection of malfunction and failures and malfunctions.
Easy installation, plug and play double socket.

Standardised time

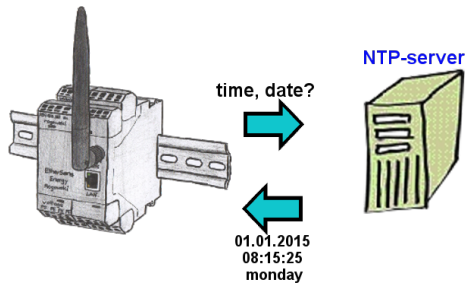

Should all EtherSens devices record time-synchronized in your equipment? By coupling with an NTP-time-server, all devices pick up the current time and adjust this.