

Menutree Website:


- + Products / docu / downloads
- + Hardware
 - + PD-interface-multiplexer
 - + T-Connector to PPI/MPI-Bus

QR-Code Website:




Please make sure to update your drivers before using our products.

Atomic time (GPRS) for the PLC

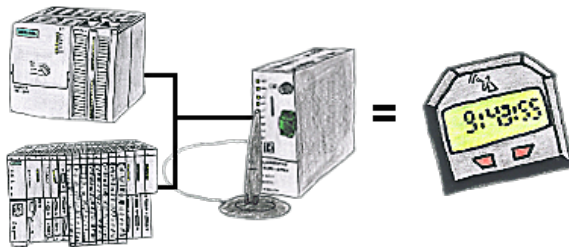

You need an exact time for your S7-plc? No problem, the TeleService-GSM fetches the current time via GPRS from a time-server and advises it to the S7-plc. How often and whenever the time shall be updated can be parameterised in the device.


Address all S7-PLCs (no matter which type) via S7-TCPIP

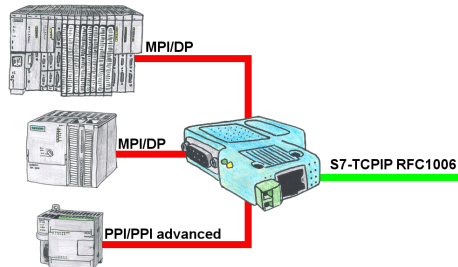

Networking of all S7-controllers (S7-200/300/400), for example with your production-data-acquisition, Industry 4.0 (OPC Server UA or Classic), panels and other devices that communicate via S7-TCPIP RFC1006. One module for all bus-types: PPI, MPI and Profibus.


Even the very old "S7-200" with a pure PPI-protocol can be used, regardless of the firmware version!

Profinet life cycle monitoring




Identify impending failures in your Profinet.
Creeping aging will be displayed to you very detailed.
The Profinet-Watchdog give you the change to react before something happens.

Data backup S7-PLC PN-port on FTP-server




S7-PLC triggered DB-backup/-restore without additional PC via PN-port on FTP-server

Universal coupling

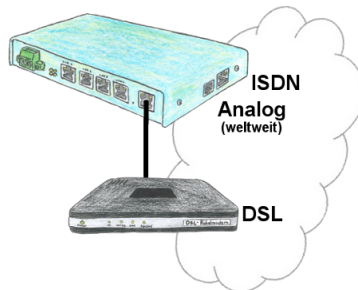

You need a family of devices with which you can solve all your requirements? No problem! With the TELE-router you are able to establish a connection via analog, ISDN or PPPoE (DSL cable modem). The devices are compatible with each other in each case, so that no further additional hardware is needed.

Profinet life cycle monitoring and alarming



Identify impending failures in your Profinet.
Creeping aging will be displayed to you very detailed.
The Profinet-Watchdog give you the change to react before something happens.

Remote maintenance / telecontrol of PLC



The access to the connected PLC with the Siemens TS-software or PG-2000 including TS-option results of coupling via Analogue-, ISDN- (only with AB-adapter) as well as GSM-line.