

**Menutree Website:**


- + Products / docu / downloads
- + Software
  - + PLC-communication-driver
  - + S7-communication-driver
  - + S7-communication-driver over LAN
  - + S7-communication-driver LAN for WinCC

**QR-Code Website:**



Please make sure to update your drivers before using our products.

Wireless around the S5-PLC



Move wirelessly around the S5-PLC and communicate for example ONLINE in the status

## Detect Profinet burglary




Detection and logging of unauthorized access in the defined Profinet

Attempted break-ins and access to the network are recognized immediately and e.g. reported by email

Logging of all accesses in the network for historical processing

Possible data-storage USB-stick or FTP-server via USB-network-stick.

## Operation as an access point

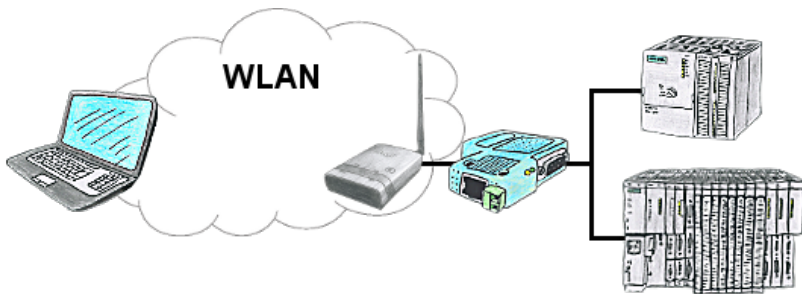


You are on site your plant and should move round the machine and simultaneously control or monitor. No problem, you parametrize ALF as an access-point and connect your S7-LAN or other network-client to him, connect your PC with him and you are online on the PLC.

## Wireless around the Bosch-PLC



Move wirelessly around the Bosch-PLC and communicate for example ONLINE in the status

## Wireless around the Allen-Bradley-PLC



Move wirelessly around the Allen-Bradley-PLC and communicate for example ONLINE in the status


## Use on-site without PC-adapter?



With the TeleService-device you can connect serial or by USB-cable to your PC/laptop and then communicate directly with the control without a PC-adapter or other S7-programming cables.

The USB-cable is a standard-cable just as the one you use at your printer.

## Set time in PLC controls



Do you need the exact time in the system/control, for example for production-documentation? Or summer/winter-time changeover, everyone is still familiar with this catchphrase. Always in March and October the problem of the time-change on the PLCs of your system(s). S5/S7-TimeServer receives the time via GPS-data and then sets this directly in the S7-controllers (where possible) or in all controllers in a defined data-block. In this way, these controllers can get the time/date from it and process it. At the same time, S5/S7-TimeServer can also work as an NTP-server in your network.