

**Menutree Website:**


- + Products / docu / downloads
- + Hardware
  - + Programming devices
    - + Programming adapter S7
    - + WLAN/WIFI
    - + WLAN/WIFI-SETs
    - + CONNECT-ROUTER-WLAN/WIFI-Set

**QR-Code Website:**



Please make sure to update your drivers before using our products.


Interface for Mitsubishi Melsec Fx- & A-series



Changes to Mitsubishi PLCs but no interface cable?


Use the SC09 cable to connect the PC to the Mitsubishi MELSEC FX & A series. Any PLC with an RS-422 interface can be connected. Including adapter cable for 8-pin DIN connection, firmly attached so that it can never be forgotten. One cable for both types, universal to the Mitsubishi PLC.

## Extension of a 3964R-line via LAN

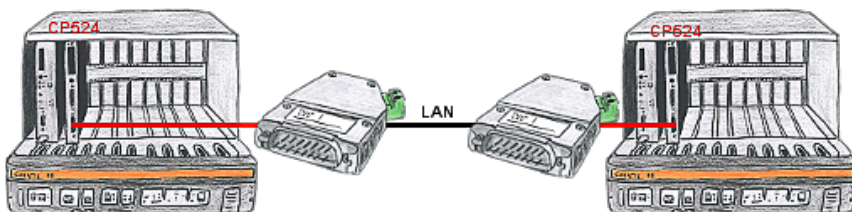


There is a control with CP524 in your outstation and the communication partner of the CP has moved locally. Connecting path is a LAN-network. So each of both participants gets a 3964R-LAN and after input of the partner's IP-address a coupling via LAN will be configured.

## Data backup S7-PLC over MPI/Profibus on USB-stick via dig. IO



Via digital input triggered DB-backup/-restore without additional PC via MPI/Profibus to USB-stick

## Watching of S5- PLC's with panel for S7-PLC

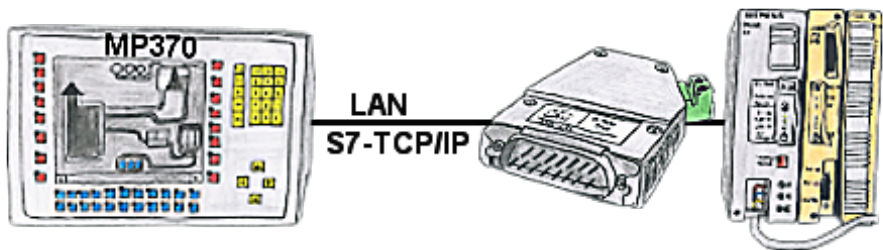

Your panel only has a LAN-socket as PLC-interface and supports only S7-RFC1006, no problem. Connect this socket with the S5-LAN++ and plug it directly on the PD-interface of the PLC. The S5-LAN++ performs adverse your panel as a S7-PLC although you receive the data from the S5-PLC. Then access to the variables and data of the S5-PLC is already available.

## S7-PLC over USB




Communication with S7-PLC via USB, just how and with what?

Data-communication with S7-PLC from PC or other devices via USB, which interface is required. Questions you don't have to worry about. With "S7 over USB" you get the right interface-products for PPI, MPI and Profibus.


Which one you use then is up to you.

## Separate your machine-net from the office-net

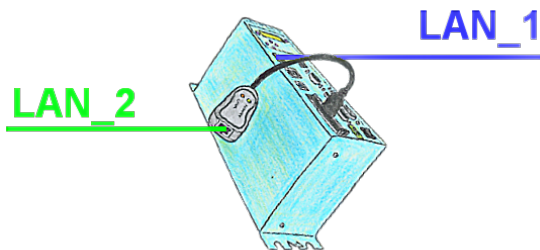

You need a separation between the machine-net and the office-net? No problem, plug a PCMCIA-LAN-card in your Tele-Prof-II-device (only for version -H) and the separation is OK. You have access to both nets via remote maintenance.

## Actual time for the PLC?

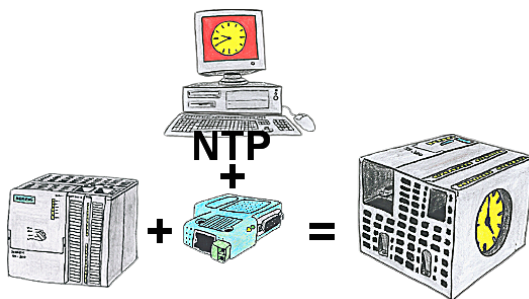

You need in your PLC a actual time? No problem, with the NTP-function the S7-LAN-module get from a NTP-(Time-)Server the actual time and transfers it direct into the configured PLC or for processing in a DB.