

Menutree Website:


- + Products / docu / downloads
- + Accessories
 - + Connector / Power supply
 - + Connector 2pins big

QR-Code Website:



Please make sure to update your drivers before using our products.

Programming S7-PLC/-modules via RS232/USB

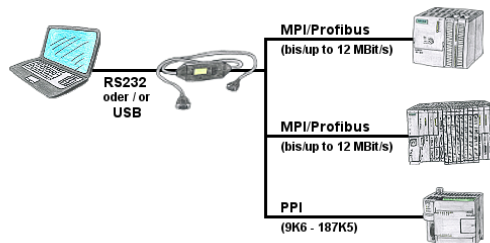

PLC-programming/-communication from the PC "serial" or via "USB" from S7-200/300/400 or modules such as Sinamix, Sinumerik, MicroMaster, drives, converters. PPI up to 187.5 Kbit (PPI + PPI advanced), MPI/Profibus up to 12 Mbit. Compatible with the Siemens driver "PC-adapter", communication only with 64-bit operating-systems via USB and TIC-driver (limitation of serial communication from Siemens to 32-bit operating-systems).

Profinet-monitoring/-diagnosis inclusive alarm-messages




Detect intrusions and anomalies on your ProfiNet.
Early detection of malfunction and failures and malfunctions.
Easy installation, plug and play double socket.

Wireless around the Pilz-PLC




Move wirelessly around the Pilz-PLC and communicate for example ONLINE in the status

Data backup S5-PLC on SD-card




S5-PLC triggered DB-backup/-restore without additional PC via PG-socket and Ethernet on SD-card

Visualisation via 3964R-interface without using the protocol itself

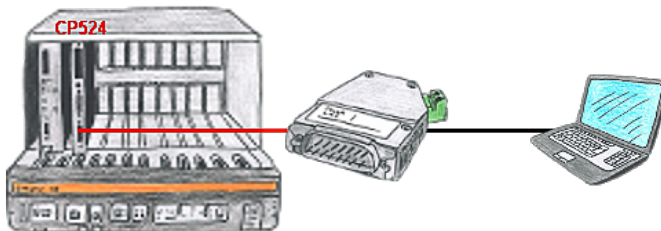

Your visualisation-software does not support a 3964R-protocol, but you have to apply this package? No problem, connect the 3964R-LAN to your CP and activate the RFC1006-emulation in the module. Now your software gets the data from the module via RFC1006, which in turn communicates with the assembly via 3964R.


Insensible communication with the S5-PLC

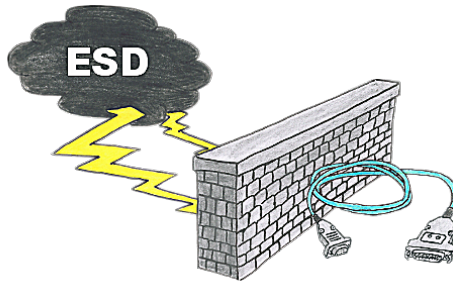

Safe communication with the S5-PLC in an environment of radiant-converters and motor-controls. Electrostatic-charging is also a KO-criterion for operation of interface-cable, a discharge and the interface-product is damaged or even defective.

PG-UNI-II is prepared for this, with its full-metal-cast-housing and ESD-proof components it offers the best protection against such influences. The shielding of the cable connected to the metal-housing is the solution. Of course, the cable can be extended to a TTY-distance of up to 300m, using of adapter for PG-UNI-cables is also possible.

Take over control-tasks

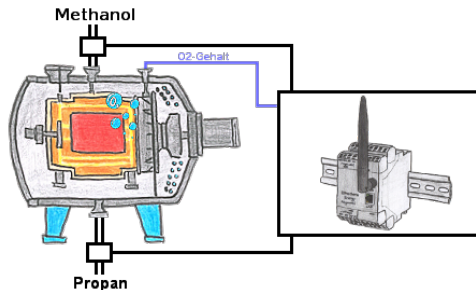

Capture with the Ethersens-device not only your process-values, you would be able to do control-tasks with the device.