

**Menutree Website:**


- + Products / docu / downloads
- + Network-plug-in-card for PCMCIA-

**QR-Code Website:**




Please make sure to update your drivers before using our products.

Remote maintenance with TS-software without original TS-adaptor

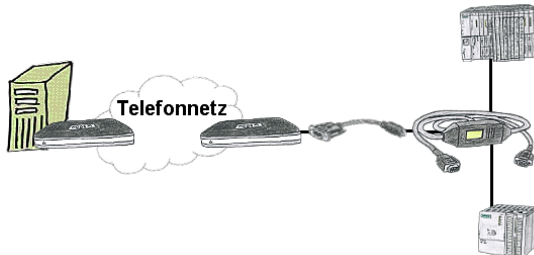


You have to reach urgent your PLC via remote maintenance and have no TS-adaptor in your company? No problem, configure with the MPI-Kabelmanager your S7-interface-cable MPI/PPI-Kabel the mode "TS" for "remote maintenance", connect this cable with the TS-Adapter (article number 9350-TS) with a standard modem and send it all to your client. Now you will be able to start the connection with your TS-software and solve the problem. And this all without buying a original TS-adaptor.

## Recognize missing Profinet participants

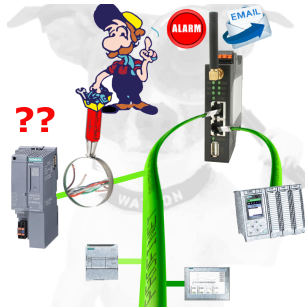


Recognize cable breakage, contact problems and line faults.  
Retransmissions and failures are logged and reported.  
Early acting before total failure of the participant.

## Current S7 panels via WLAN to the S5 controller




Connect each S7-TCP-IP panel to your S5.  
Now also available via WLAN for mobile workstations.  
PARALLEL several panels and even simultaneous PG connections possible.  
Include hard-to-reach places in your ERP system.

## Remote maintenance / telecontrol of PLC-devices

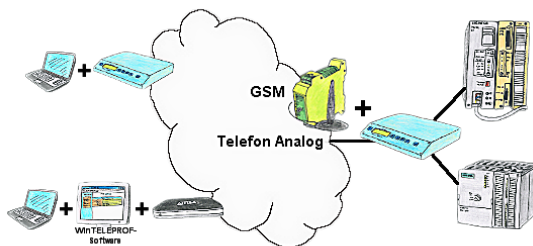

Access to the connected PLC takes place by coupling via Analogue-, ISDN- (only with AB-adapter) and GSM-(only with external GSM-modem)-line.

## Direct Voice-speech-output with MESSI NG 3G

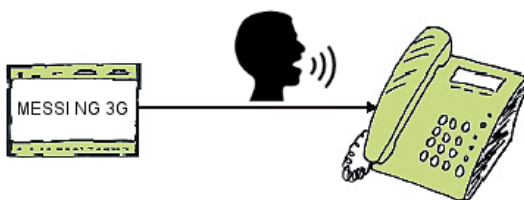


Transmission of fault messages as a voice message to several participants

MESSI NG 3G can send stored-voice-messages to specific recipients depending on the defined input and signal status. To do this, the specified phone-numbers are called according to the phone-number-plan and then the digitized voice-message is transmitted.

Depending on whether the message has been acknowledged or not, the next participant in the numbering-plan will be informed.


Let yourself for example, giving water-levels over the phone, MESSI NG 3G will do this for you.

## Wireless around the S7-PLC



Move wirelessly around the S7-PLC and communicate for example ONLINE in the status

## Operation as bridge

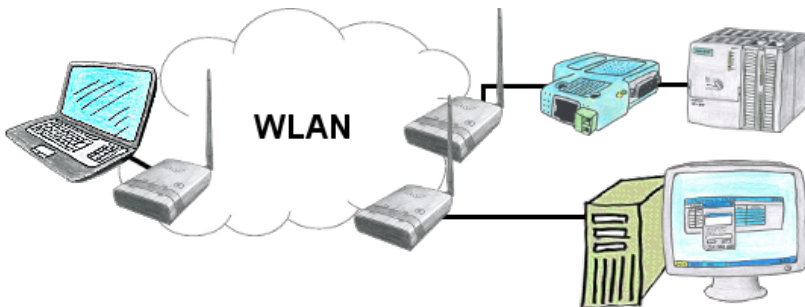

You have two or more clients which should communicate together without LAN-cable-connection? No problem, you connect a "Access-Point" configured ALF to this device and to the other device a "Client" configured ALF. Then connect the "Client" with the "Access-Point" and the device are able to communicate together.